




Connecting diagrams

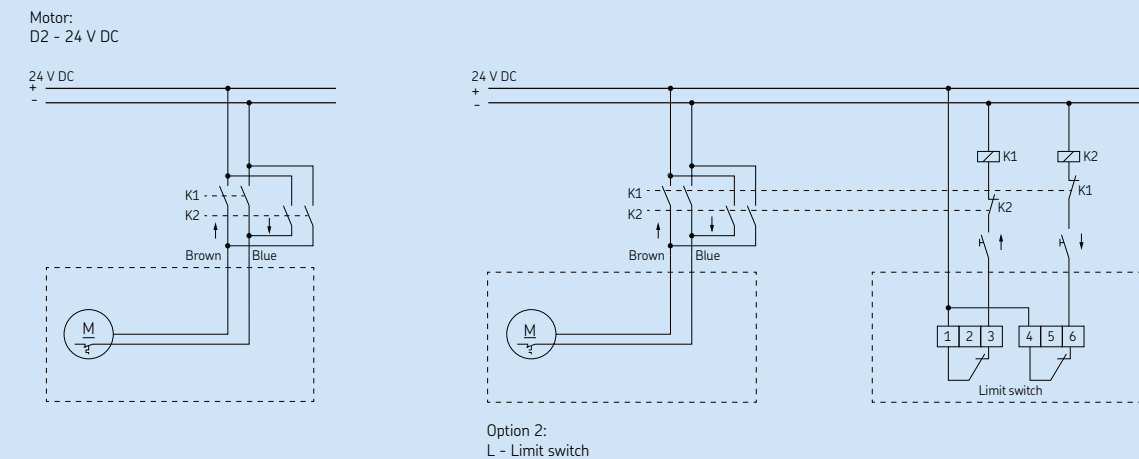

Connecting diagrams

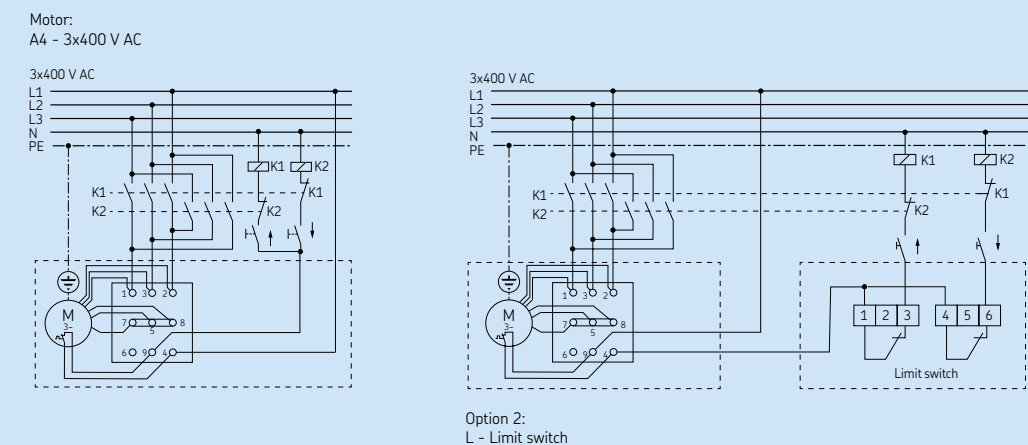

Connecting diagrams

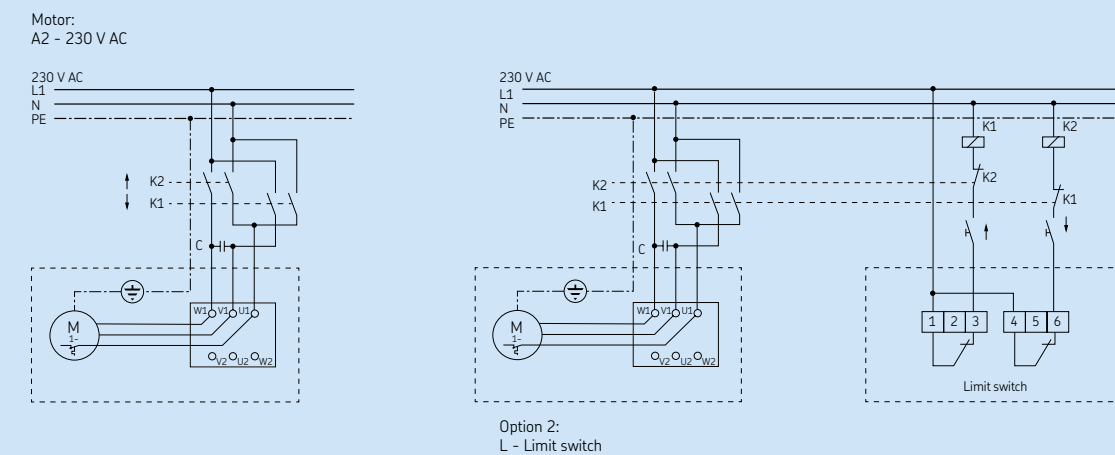

Ordering key

Performance and self locking table

Load [N] / Full Load Speed [mm/s]						Screw			Motor		
10 000 / 14	NSL	12 000 / 11	NSL	15 000 / 5	NSL	15 000 / 3	SL	L	S	D2	24 V DC
TBD	NSL	10 000 / 27	NSL	13 000 / 15	NSL	15 000 / 8	SL	B	N	D2	24 V DC
5 000 / 12	SL	7 000 / 8	SL	10 000 / 4	SL	15 000 / 2	SL	L	S	A2	230 V AC
TBD	NSL	TBD	NSL	TBD	NSL	TBD	SL	B	N	A2	230 V AC
10 000 / 10	SL	12 000 / 7	SL	15 000 / 4	SL	15 000 / 2	SL	L	S	A4	3x400 V AC
10 000 / 25	NSL	12 000 / 18	NSL	15 000 / 11	NSL	15 000 / 5	SL	B	N	A4	3x400 V AC
<b>07</b>		<b>10</b>		<b>20</b>		<b>40</b>					

NLS = Not self-locking: Brake Option required to be self locking  
 SL = Self locking: No Brake Option required to be self locking, brake optional possible

CAHM-35-0-0-0-0-0-0

Type

Size (Gear Center Distance)  
35 mm

Gear Ratio

7	0 7
10	1 0
20	2 0
40	4 0

Screw Type

Lead screw 20x4  
 Ball screw 25x10

Stroke

100 mm	0 1 0 0 0
200 mm	0 2 0 0 0
300 mm	0 3 0 0 0
400 mm	0 4 0 0 0
500 mm	0 5 0 0 0
600 mm	0 6 0 0 0
700 mm	0 7 0 0 0

Motor

24 V DC  
 3x400 V AC  
 230 V AC

Front Attachment

No option = standard - thread M18x2,5-40  
 Fork head  
 Rod end

Option 1 - Brake

No option  
 Magnetic brake (1.4Nm / 24 VDC / IP20) → Required on specific types to be self-locking (see table)

Option 2

No option  
 Limit switch  
 Potentiometer (1 000 Ω)  
 Encoder 1063,0020

Customer option

© SKF is a registered trademark of the SKF Group.

© SKF Group 2015  
 The contents of this publication are the copyright of the publisher and may not be reproduced (even extracts) unless prior written permission is granted. Every care has been taken to ensure the accuracy of the information contained in this publication but no liability can be accepted for any loss or damage whether direct, indirect or consequential arising out of the use of the information contained herein.

PUB MT/P8 15707 EN · October 2015




# Linear actuator

## CAHM-35







### Benefits

- Modular
- Robust
- Reliable
- High speed and/or high load
- All metal design

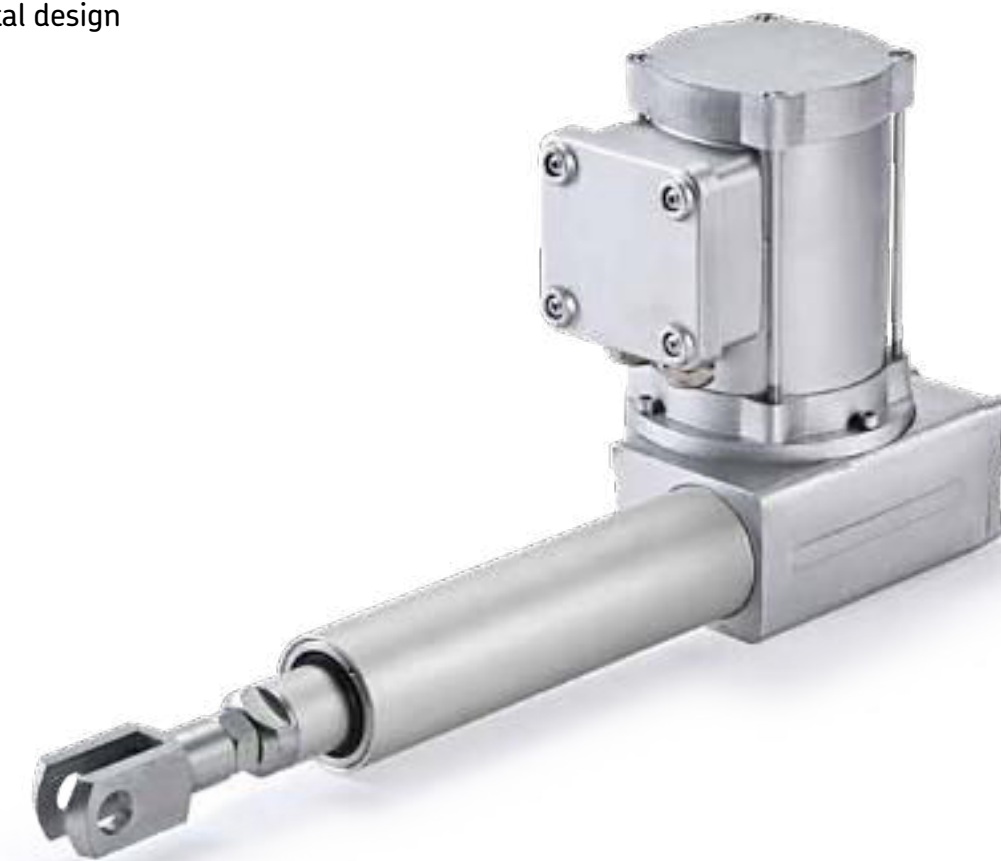

Picture CAHM-3510-BN0300-A2-F00



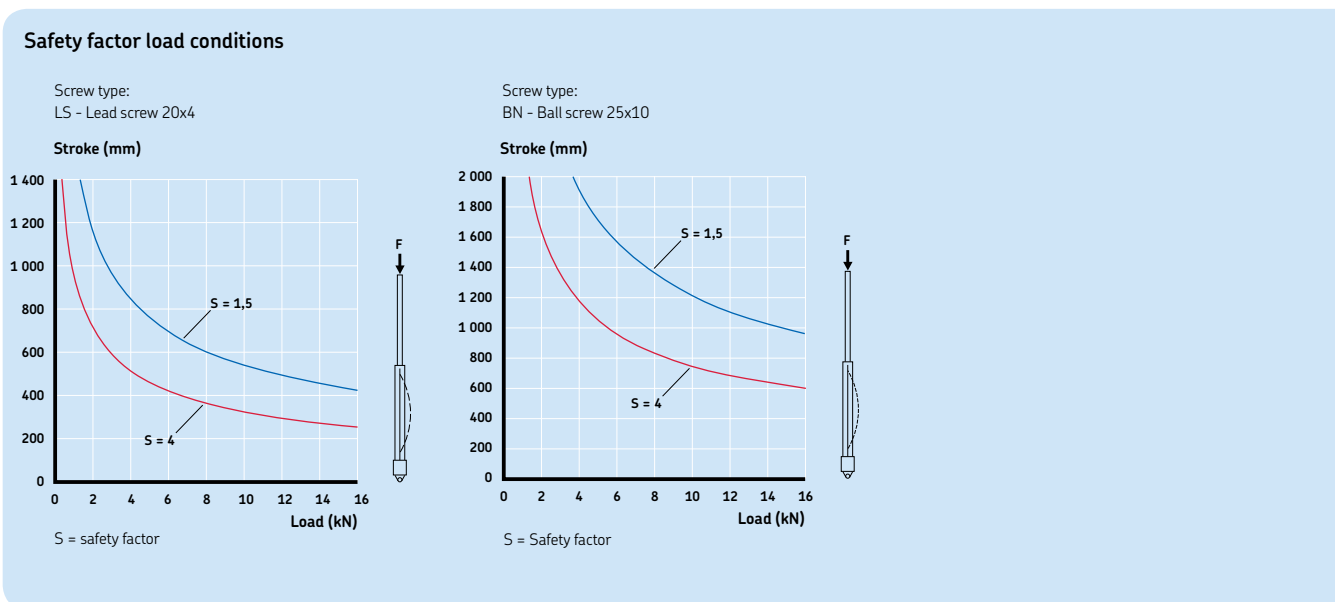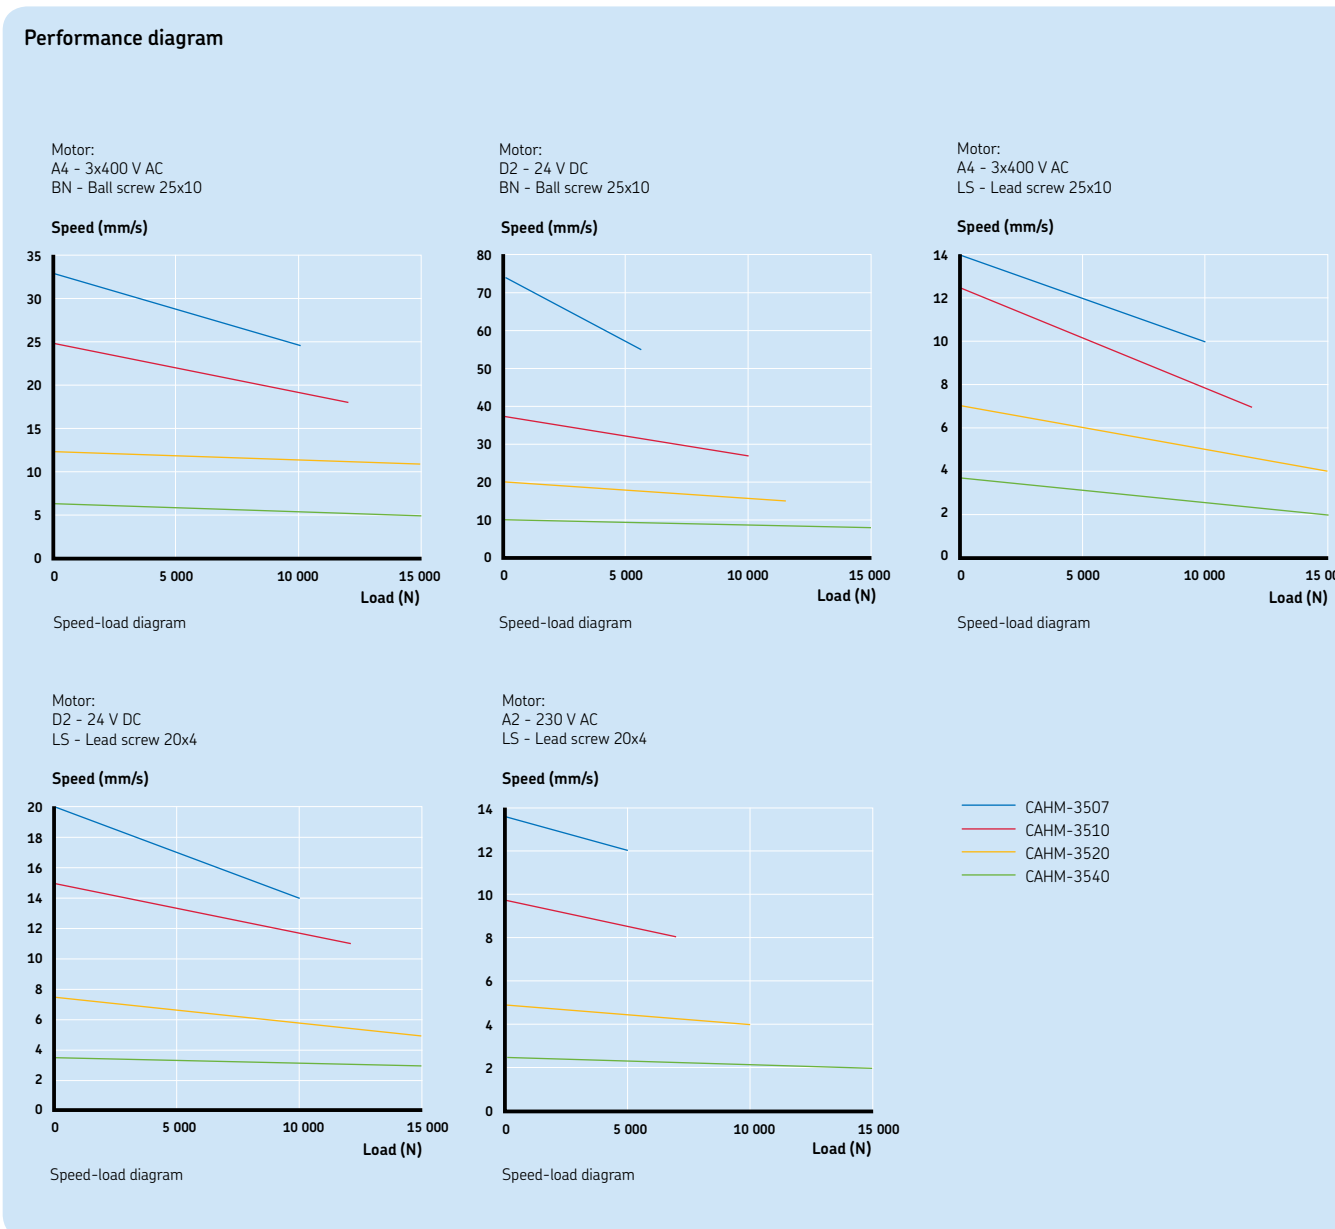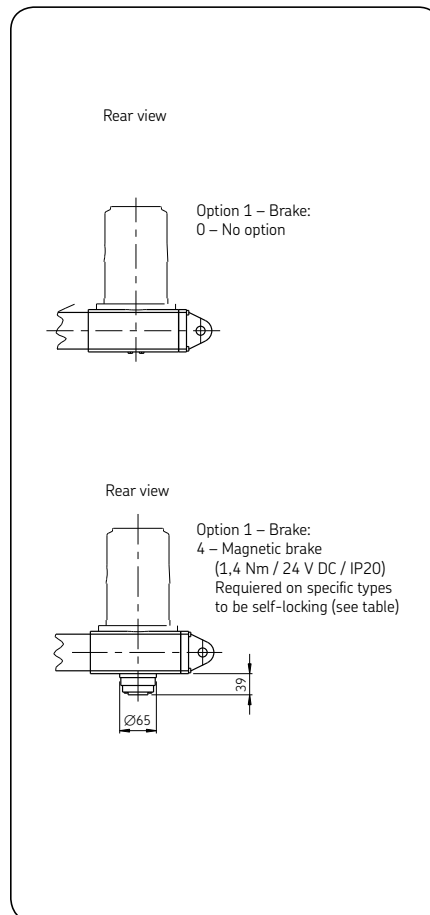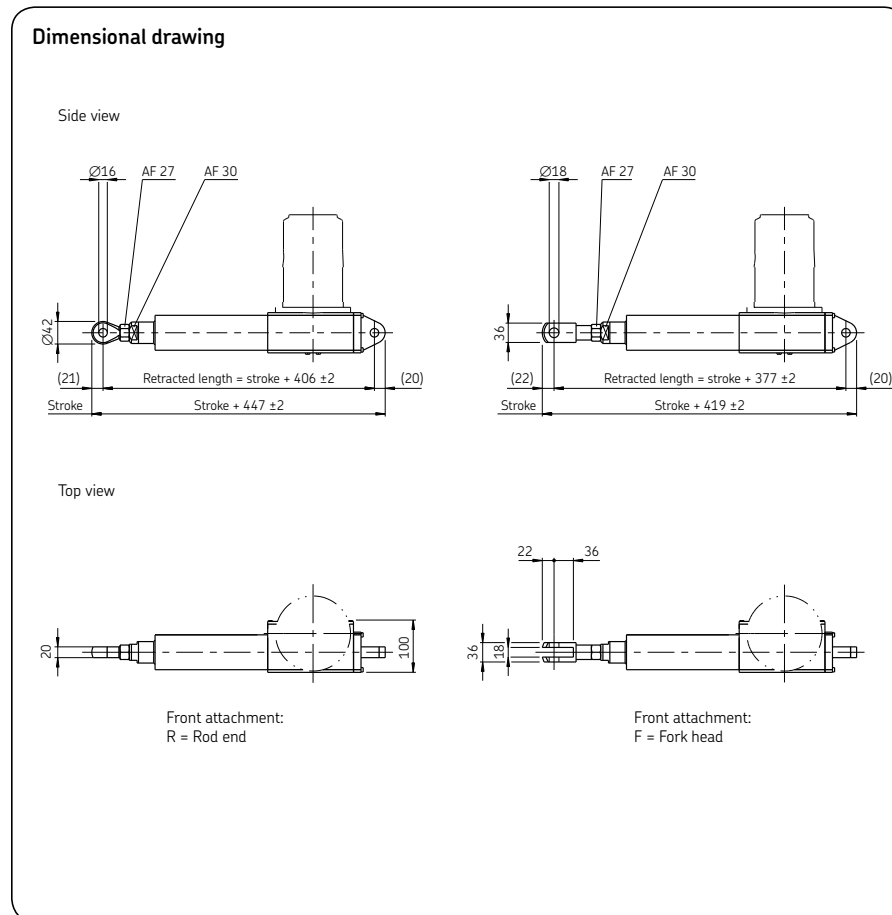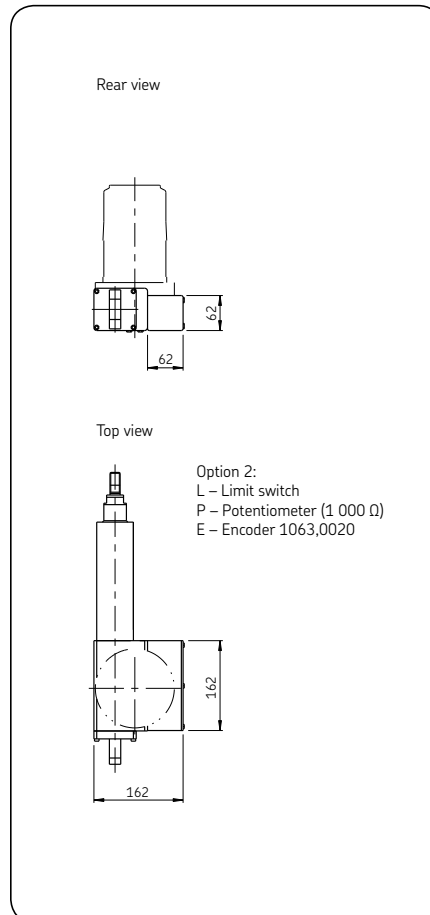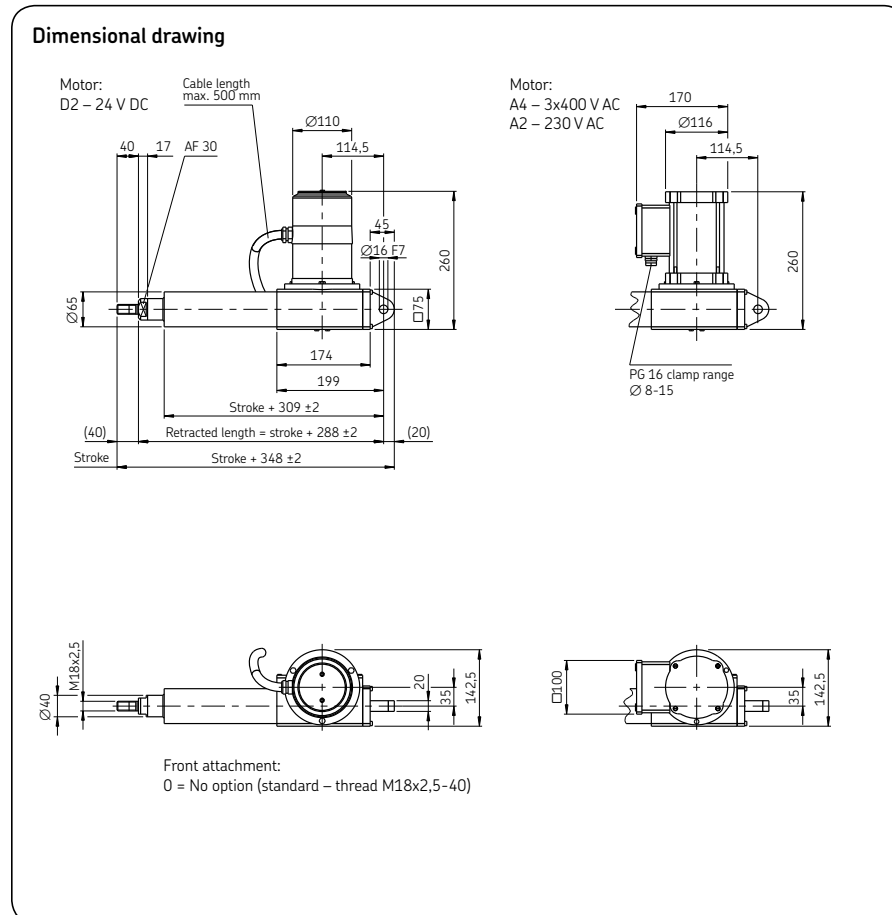

**Technical data**

Unit	CAHM-3507-LS0XXX-D2	CAHM-3510-LS0XXX-D2	CAHM-3520-LS0XXX-D2	CAHM-3540-LS0XXX-D2	CAHM-3510-BN0XXX-D2	CAHM-3520-BN0XXX-D2	CAHM-3540-BN0XXX-D2
Motor	–	D2	D2	D2	D2	D2	D2
Voltage	V DC	24	24	24	24	24	24
Screw type	–	LS	LS	LS	BN	BN	BN
Rated push load	N	10 000	12 000	15 000	10 000	13 000	15 000
Rated pull load	N	10 000	12 000	15 000	10 000	13 000	15 000
Speed (at full load)	mm/s	14	11	5	27	15	8
Stroke	mm	100 to 700	100 to 700	100 to 700	100 to 700	100 to 700	100 to 700
Power consumption	W	840	840	768	720	672	–
Current consumption	A	35	35	32	30	28	–
Duty cycle	%	10 (1/9)	10 (1/9)	10 (1/9)	10 (1/9)	10 (1/9)	10 (1/9)
Ambient temperature	°C	-10 to +40	-10 to +40	-10 to +40	-10 to +40	-10 to +40	-10 to +40
Type of protection	IP	54	54	54	54	54	54
Weight (at 200 mm stroke)	kg	14,6	14,6	14,6	14,6	14,6	14,6
Color	–	Silver	Silver	Silver	Silver	Silver	Silver

Unit	CAHM-3507-LS0XXX-A4	CAHM-3510-LS0XXX-A4	CAHM-3520-LS0XXX-A4	CAHM-3540-LS0XXX-A4	CAHM-3507-BN0XXX-A4	CAHM-3510-BN0XXX-A4	CAHM-3520-BN0XXX-A4	CAHM-3540-BN0XXX-A4
Motor	–	A4	A4	A4	A4	A4	A4	A4
Voltage	V AC	3x400	3x400	3x400	3x400	3x400	3x400	3x400
Screw type	–	LS	LS	LS	BN	BN	BN	BN
Rated push load	N	10 000	12 000	15 000	10 000	12 000	15 000	15 000
Rated pull load	N	10 000	12 000	15 000	10 000	12 000	15 000	15 000
Speed (at full load)	mm/s	10	7	4	25	18	11	5
Stroke	mm	100 to 700	100 to 700	100 to 700	100 to 700	100 to 700	100 to 700	100 to 700
Power consumption	W	920	800	700	920	800	750	600
Current consumption	A	1,8	1,7	1,6	1,8	1,7	1,6	1,5
Duty cycle	%	25 (2,5/7,5)	10 (1/9)	10 (1/9)	25 (2,5/7,25)	10 (1/9)	10 (1/9)	10 (1/9)
Ambient temperature	°C	-10 to +40	-10 to +40	-10 to +40	-10 to +40	-10 to +40	-10 to +40	-10 to +40
Type of protection	IP	54	54	54	54	54	54	54
Weight (at 200 mm stroke)	kg	14,6	14,6	14,6	14,6	14,6	14,6	14,6
Color	–	Silver	Silver	Silver	Silver	Silver	Silver	Silver

Unit	CAHM-3507-LS0XXX-A2	CAHM-3510-LS0XXX-A2	CAHM-3520-LS0XXX-A2	CAHM-3540-LS0XXX-A2
Motor	–	A2	A2	A2
Voltage	V AC	230	230	230
Screw type	–	LS	LS	LS
Rated push load	N	5 000	7 000	10 000
Rated pull load	N	5 000	7 000	10 000
Speed (at full load)	mm/s	12	8	4
Stroke	mm	100 to 700	100 to 700	100 to 700
Power consumption	W	700	710	710
Current consumption	A	3,3	3,5	3,5
Duty cycle	%	15 (1,5/8,5)	10 (1/9)	10 (1/9)
Ambient temperature	°C	-10 to +40	-10 to +40	-10 to +40
Type of protection	IP	54	54	54
Weight (at 200 mm stroke)	kg	14,6	14,6	14,6
Color	–	Silver	Silver	Silver